

## Portable Spot Cooler - Air Cooled

MODEL: PAC	1211	1811	2412	3612	3632	3634	6012	6032	6034
Cooling Capacity <sup>2</sup>	11,800	16,800	24,020	36,050	36,050	36,050	60,100	60,100	60,100
Voltage (V/Phase) at 60Hz <sup>1</sup>	115/1		208-230/1	208-230/1	208-230/3	460/3	208-230/1	208-230/3	460/3
Amps <sup>6</sup>	10.4	14.1	14.9	18.1	17.2	8.7	32.0	20.4	14.8
Watts <sup>6</sup>	1180	1670	2700	3620	3620	3620	6000	6000	6000
In Rush Current (Amps)	60	75	68	113	93	60	178	162	87
Plug Type	5-15P	5-20P	6-20P	6-30P	L15-30P	L16-20P	6-50P	L15-30P	L16-20P
EER <sup>4</sup>	10.0	10.0	8.9	10.0	10.0	10.0	10.0	10.0	10.0
Compressor HP	1	1 1/2	2	3	3	3	5	5	5
Compressor RLA	9.5	12.3	10.5	13.6	8.8	5.0	27.6	18.1	9.0
Compressor LRA	50	63	48	83	77	35	158	137	62
Evap CFM <sup>3</sup>	400	600	810	1200	1200	1200	1950	1950	1950
Evap Motor HP	1/8	1/8	1/3	1/3	1/3	1/3	1	1	1
Evap Motor Watts	130	210	370	420	420	420	700	700	700
Condenser CFM <sup>3</sup>	580	930	1010	1390	1390	1390	2200	2200	2200
Condenser Motor HP	1/8	1/8	1/3	1	1	1	1	1	1
Condenser Motor Watts	190	280	490	860	860	860	1100	1100	1100
Condensate	5 Gallon Condensate Tank - STANDARD (Pump Optional)						Pump -STANDARD (20 ft. Lift)		
Sound Level <sup>5</sup>	54	60	65				69	78	
R-410A Charge Oz.	18	40	37				66	80	
(A) Height with Casters (in.)	36 1/2	45 1/2		50-1/4			51-1/2		
(B) Width (in.)	20	23		27-1/2					
(C) Depth (in.)	25	30		35			39-1/2		
(D) Height w/o Casters (in.)	32 1/2	40 1/2		45			45-1/2		
Net Weight (lb.)	180	260	260	365		380	485	485	515
Shipping Weight (lb.)	200	285	285	405		420	525	525	555
Shipping Volume (cu. ft.)	19	28		40			48		



**SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**


**NOTES**

1. Dedicated Circuit and Time Delay fuse or circuit breaker are recommended
2. Cooling Capacity is total BTUH at 80°DB/67° WB return air, 95° DB Condenser Air
3. CFM with free discharge
4. Cooling EER is determined with condenser discharge air ducted into another area
5. Sound Pressure, dB at 5 feet, commercial operation
6. Amps & Watts at 208 Volts (208-230 V Models)

**COOLING AMBIENT\***

**OPERATING RANGE 65° TO 105°F\***

\* May COOL down to 55°F if equipped with hot gas bypass (factory installed option)

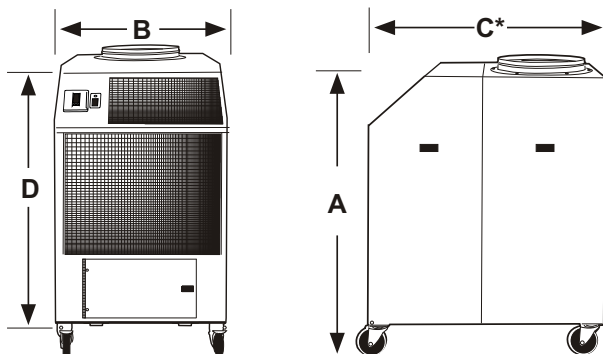

**\* CONDENSER PLENUM ALLOWANCES**

For Size 12, 18 and 24 Models, add 13 inches to Dim C  
 For Size 36 and 60 Models, add 17 inches to Dim C



**NOT APPROVED FOR OUTDOOR USE**

**WARRANTY**

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

**1 YEAR ON THE FULL PRODUCT**

PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR (RESTRICTIONS APPLY)



**AIR COOLED**

